

PRO~flex series



Part no.	Product name	Meas. range [A]	Max. conductor Ø [mm]	Bandwidth [kHz]	Output signal [mV/A]	Connector	Power supply
P-02.710.0	ACP 3000/24	30/300/3000	176	20	100/10/1	4mm	Battery
P-02.712.5	ACP 3000/36	30/300/3000	264	20	100/10/1	4mm	Battery
P-02.712.6	ACP 3000/48	30/300/3000	352	20	100/10/1	4mm	Battery
P-02.713.9	ACP 3005/24	30/300/3000	176	20	100/10/1	BNC	+3V external or battery
P-02.714.0	ACP 3005/36	30/300/3000	264	20	100/10/1	BNC	+3V external o. battery
P-02.714.1	ACP 3005/48	30/300/3000	352	20	100/10/1	BNC	+3V external or battery
P-02.760.0	ACP 6000_3/24	60/600/6000	176	20	50/5/0.5	BNC	+3V external or battery
P-02.760.4	ACP 6000_3/36	60/600/6000	264	20	50/5/0.5	BNC	+3V external or battery
P-02.760.5	ACP 6000_3/48	60/600/6000	352	20	50/5/0.5	BNC	+3V external or battery
P-02.710.3	ACP 3003_3/24	3 x 30/300/3000	176	20	100/10/1	3 x BNC	+3V external or battery
P-02.713.7	ACP 3003_3/36	3 x 30/300/3000	264	20	100/10/1	3 x BNC	+3V external or battery
P-02.713.8	ACP 3003_3/48	3 x 30/300/3000	352	20	100/10/1	3 x BNC	+3V external or battery
P-02.762.1	ACP 6003_3/24	3 x 60/600/6000	176	20	50/5/0.5	3 x BNC	+3V external or battery
P-02.762.2	ACP 6003_3/36	3 x 60/600/6000	264	20	50/5/0.5	3 x BNC	+3V external or battery
P-02.762.3	ACP 6003_3/48	3 x 60/600/6000	352	20	50/5/0.5	3 x BNC	+3V external or battery

SHORTFORM_E_120416_03

GMC-I PROsys Ltd.

Allied Business Centre | 1 Potter Place | Skelmersdale | Lancashire | WN8 9PH | United Kingdom
 Telephone: +44 (0) 1695 567280 | Fax: +44 (0) 1695 567299
 www.i-prosys.com | sales@i-prosys.com

Registered Company Number: 5116760
 Vat Number: GB863880193

MICRO~flex series



Part no.	Product name	Meas. range [A]	Max. conductor Ø [mm]	Bandwidth [kHz]	Output signal [mV/A]	Connector	Power supply
P-06.460.3	ACP 300/2	3/30/300	50	70	500/50/5	4 mm	+3V external or battery
P-06.460.4	ACP 300/3	3/30/300	70	70	500/50/5	4 mm	+3V external or battery
P-06.460.5	ACP 300/4	3/30/300	100	70	500/50/5	4 mm	+3V external or battery
P-06.690.0	ACP 2005/2	20/200/2000	50	100	100/10/1	BNC	+3V external or battery
P-06.690.1	ACP 2005/3	20/200/2000	70	100	100/10/1	BNC	+3V external or battery
P-06.690.2	ACP 2005/4	20/200/2000	100	100	100/10/1	BNC	+3V external or battery
P-06.690.3	ACP 2015/2	20/200/2000	50	1 MHz	100/10/1	BNC	+3V external or battery
P-06.690.4	ACP 2015/3	20/200/2000	70	1 MHz	100/10/1	BNC	+3V external or battery
P-06.690.5	ACP 2015/4	20/200/2000	100	1 MHz	100/10/1	BNC	+3V external or battery
P-06.600.6	ACP 1000/2	10/100/1000	50	20	100/10/1	4 mm	Battery
P-06.600.7	ACP 1000/3	10/100/1000	70	20	100/10/1	4 mm	Battery
P-06.600.8	ACP 1000/4	10/100/1000	100	20	100/10/1	4 mm	Battery
P-06.600.9	ACP 1005/2	10/100/1000	50	100	100/10/1	BNC	+3V external or battery
P-06.601.0	ACP 1005/3	10/100/1000	70	100	100/10/1	BNC	+3V external or battery
P-06.601.1	ACP 1005/4	10/100/1000	100	100	100/10/1	BNC	+3V external or battery
P-06.600.3	ACP 1003_3/2	3 x 10/100/1000	50	100	100/10/1	BNC	+3V external or battery
P-06.600.4	ACP 1003_3/3	3 x 10/100/1000	70	100	100/10/1	BNC	+3V external or battery
P-06.600.5	ACP 1003_3/4	3 x 10/100/1000	100	100	100/10/1	BNC	+3V external or battery


SHORTFORM_E_120416_03

GMC-I PROsys Ltd.

Allied Business Centre | 1 Potter Place | Skelmersdale | Lancashire | WN8 9PH | United Kingdom
 Telephone: +44 (0) 1695 567280 | Fax: +44 (0) 1695 567299
 www.i-prosys.com | sales@i-prosys.com

Registered Company Number: 5116760
 Vat Number: GB863880193

PRO~flex & MICRO~flex DIN rail mounting

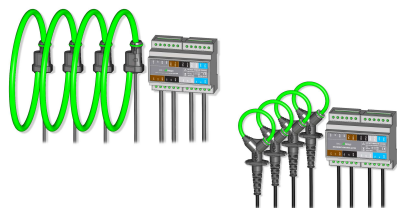

Part no.	Product name	Meas. Range [A]	Max. conductor Ø [mm]	Bandwidth [kHz]	Output signal [mV/A]	Connector	Power supply
P-14.500.3	DRP 503/18	3 x 500	132	10	0.667	Screw terminals	+12V
P-14.500.0	DRP 504/18	4 x 500	132	10	0.667	Screw terminals	+12V
P-14.500.2	DRM 503/4	3 x 500	100	10	0.667	Screw terminals	+12V
P-14.500.1	DRM 504/4	4 x 500	100	10	0.667	Screw terminals	+12V

AC/DC Current Probes



Part no.	Product name	Meas. range [A]	Max. conductor Ø [mm]	Bandwidth [kHz]	Output signal [mV/A]	Connector	Power supply
P-12.200.1	CP 30	30	25	20	100	4 mm	Battery
P-12.200.2	CP 35	30	25	100	100	BNC	Battery
P-12.460.0	CP 305	30/300	25	20	10/1	4 mm	Battery
P-12.230.0	CP 41	4/40	25	DC / 15-400Hz	Display		Battery
P-12.480.0	CP 410	40/400	25	DC / 15-400Hz	Display		Battery
P-12.601.0	CP 1010	100/1000	32	DC / 15-400Hz	Display		Battery
P-12.600.1	CP 1000	1000	32	10	1	4 mm	Battery
P-12.600.2	CP 1005	100/1000	32	20	10/1	BNC	Battery
P-12.080.1	CP 5_10	5	25	100	1000	-	±10.5 ... ±16V
P-12.201.3	CP 30_11	30	32	20	100	-	+12V
P-12.250.0	CP 50_10	50	25	100	100	-	±10.5 ... ±16V
P-12.390.2	CP 150_10	150	25	100	50	-	±10.5 ... ±16V

SHORTFORM_E_120416_03

GMC-I PROsys Ltd.

Allied Business Centre | 1 Potter Place | Skelmersdale | Lancashire | WN8 9PH | United Kingdom
 Telephone: +44 (0) 1695 567280 | Fax: +44 (0) 1695 567299
 www.i-prosys.com | sales@i-prosys.com

Registered Company Number: 5116760
 Vat Number: GB863880193